




Discrete Proportional Valve System

The discrete proportional valve system (DPV) uses two or more ON/OFF solenoid valves of differing flow coefficients, housed in a single manifold, to provide stepped-function flow control. The valves are actuated in specific combinations to deliver the desired flow rate, which can include a true zero-flow state. The valves use only a short pulse of power to actuate and do not draw any power to maintain state. The valve system inherently exhibits zero hysteresis because the same valve members are opened or closed in the same combination regardless of whether the flow rate is increasing or decreasing.

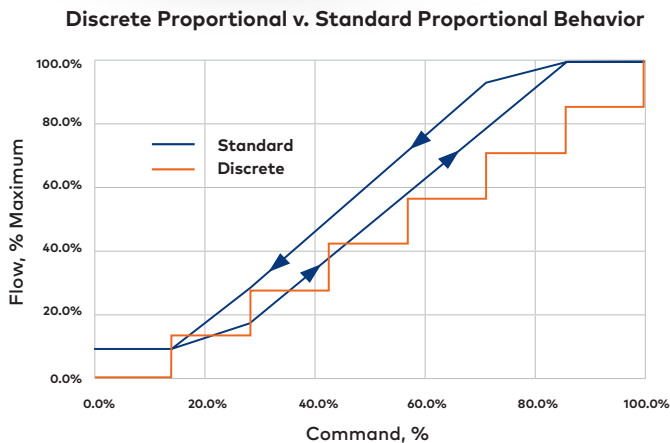

Discrete proportional valve system and continuous proportional valve performance curves

Features & Benefits

- + Customizable flow control for 4, 8, or 16 positions
- + Zero hysteresis by design
- + Debris tolerant
- + Draws no current to maintain state
- + Customizable to almost any DC voltage signal
- + Customizable flow characteristics
- + Scalable to meet application requirements

Applications

- + Thermal management
- + Coolant control
- + Flow control
- + Process fluid control
- + Spraying systems


(continued to next page)

Technical Data (custom configurations available)

Flow Characteristics in a DPV Example

State	Flow Rate GPM	Flow Rate L/min	Delta P psi	Delta P kPa
0	0.0	0.0	9.4	65
1	0.6	2.3	8	55
2	1.1	4.0	7.3	50
3	1.4	5.3	6.7	46
4	1.5	5.8	6.4	44
5	1.7	6.5	6.1	42
6	1.9	7.2	5.8	40
7	2.1	8.1	5.4	37

Flow characteristics in a DPV example with eight discrete positions

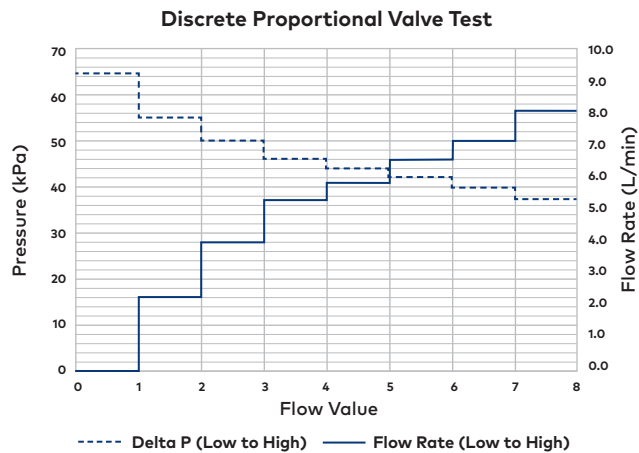

- + DC actuated
- + 12 or 24 Vdc
 - Reverse polarity required to operate solenoid in both directions
 - Can be implemented on a local or vehicle control board



Electrical Specifications

	12 Vdc System	24 Vdc System
Peak Amp Draw	2 A	1 A
Latched Draw	0 A	0 A
Resistance at 20°C	7.38 Ω	28.2 Ω
Peak Power	24 W	24 W

- + 1/2" hose barb connections
- + See chart and graph for more flow characteristics

All TLX components are customized to fit system requirements, meaning technical specifications are unique to each customer and design. Examples given are for illustration purposes only.

Dimensional Drawings (dimensions in millimeters [inches])

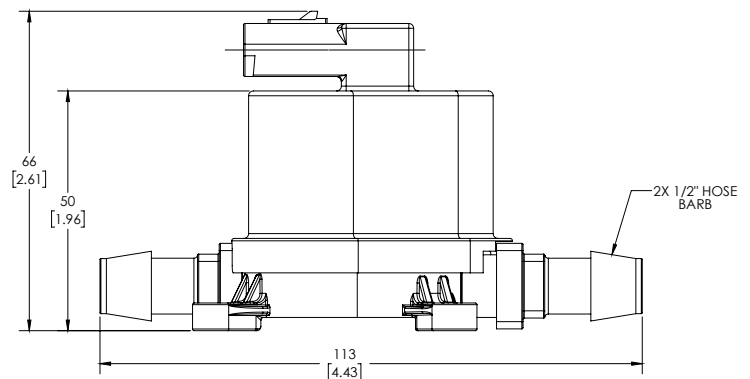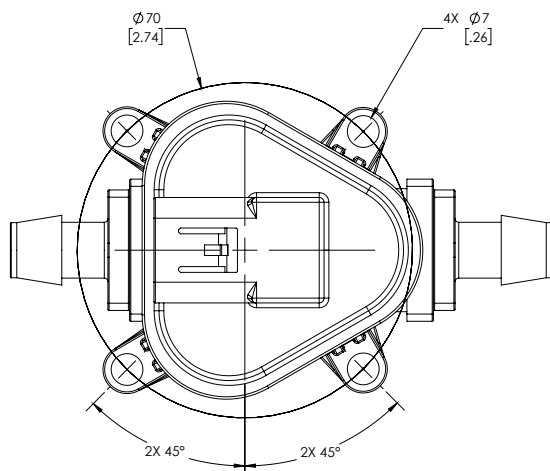

Legal Disclaimer Notice

ALL PRODUCT, PRODUCT SPECIFICATIONS, AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE.

TLX Technologies, LLC makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, TLX Technologies disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on TLX Technologies' knowledge of typical requirements that are often placed on TLX Technologies' products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in data sheets and/or specifications may vary in different applications, and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify TLX Technologies' terms and conditions of purchase, including but not limited to the warranty expressed therein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of TLX Technologies. Product names and markings noted herein may be trademarks of their respective owners.