




Discrete Proportional Valve (DPV) System

Discrete Proportional Valve (DPV) technology relies on the intelligent combination of simple binary (ON/OFF) solenoid valves with varied port sizes to achieve stepped proportional control. Two or more ON/OFF valves with differing flow coefficients are combined in a single manifold. Using selective actuation of the valves, a stepped approximation of a linear flow response is achieved. For example, a system of three valves gives 2^3 or eight possible flow states. The DPV can be designed to include a zero-flow state or a specified minimum flow state.

DPV technology allows design teams to structure semi-proportional control that best suits their application needs while realizing the benefits associated with the technology. Based on application requirements, the number of flow stages and associated volumes can be predetermined to achieve the optimal flow characteristics that will enhance any system design.

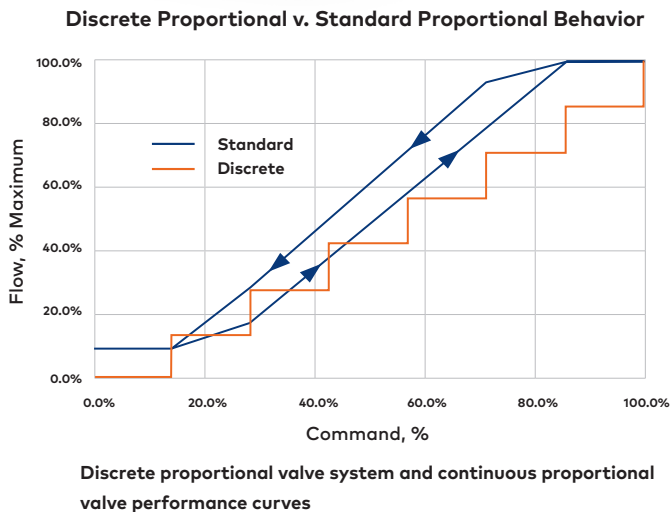

Features & Benefits

- + Customizable flow control for 4, 8, or 16 positions
- + Zero hysteresis by design
- + Debris tolerant
- + Zero steady-state power
- + Coil customizable to almost any DC voltage signal
- + Flow characteristics can be customized
- + Scalable to meet your application requirements

Applications

- + Thermal management
- + Coolant control
- + Flow control
- + Process fluid control
- + Spraying systems


(continued to next page)

Technical Data (custom configurations available)

Flow Characteristics in a DPV Example

State	Flow Rate GPM	Flow Rate L/min	Delta P psi	Delta P kPa
0	0.0	0.0	9.4	65
1	0.6	2.3	8	55
2	1.1	4.0	7.3	50
3	1.4	5.3	6.7	46
4	1.5	5.8	6.4	44
5	1.7	6.5	6.1	42
6	1.9	7.2	5.8	40
7	2.1	8.1	5.4	37

Flow characteristics in a DPV example with eight discrete positions

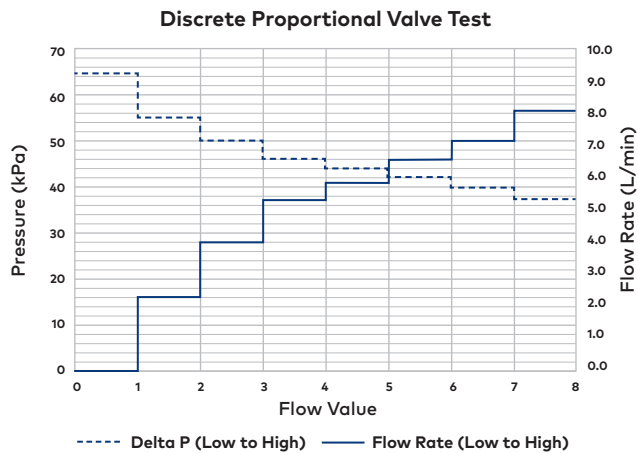

- + DC actuated with magnetic latching
- + 12 or 24 Vdc
 - Reverse polarity required to operate solenoid in both directions
 - Can be implemented on a local or vehicle control board



Electrical Specifications

	12 Vdc System	24 Vdc System
Peak Amp Draw	2 A	1 A
Latched Draw	0 A	0 A
Resistance at 20°C	7.38 Ω	28.2 Ω
Peak Power	24 W	24 W

- + ½" hose barb connections
- + See chart and graph for more flow characteristics

All TLX components are customized to fit system requirements, meaning technical specifications are unique to each customer and design. Examples given are for illustration purposes only.

Dimensional Drawings (dimensions in millimeters [inches])

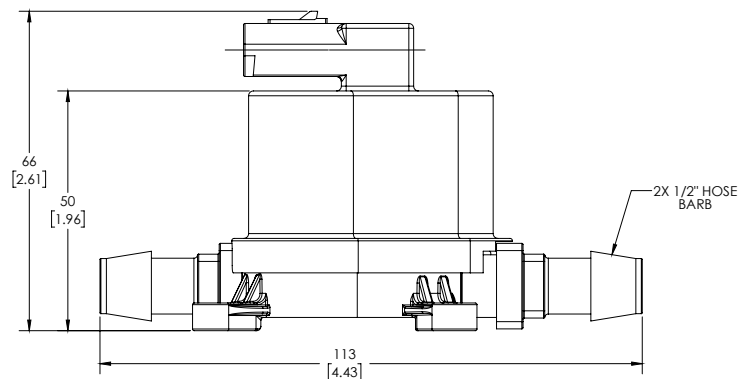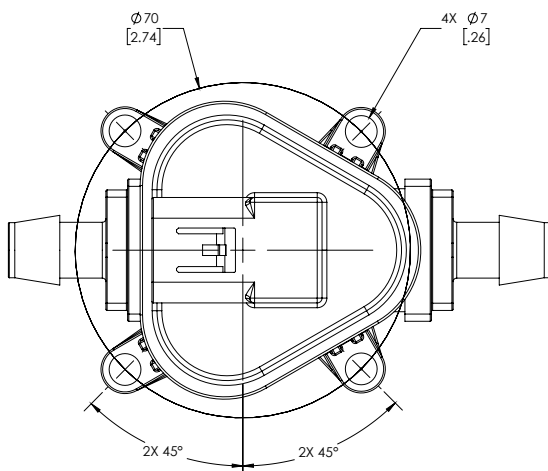

Legal Disclaimer Notice

ALL PRODUCT, PRODUCT SPECIFICATIONS, AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE.

TLX Technologies, LLC makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, TLX Technologies disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on TLX Technologies' knowledge of typical requirements that are often placed on TLX Technologies' products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in data sheets and/or specifications may vary in different applications, and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify TLX Technologies' terms and conditions of purchase, including but not limited to the warranty expressed therein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of TLX Technologies. Product names and markings noted herein may be trademarks of their respective owners.