


Manual Reset Latching Solenoid

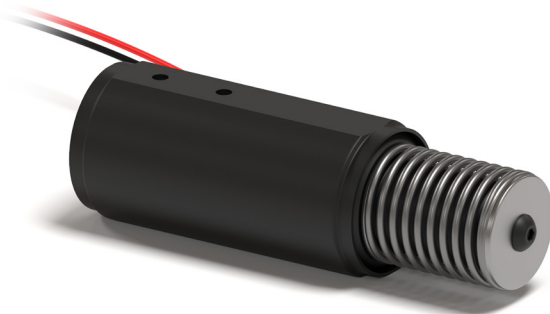

The manual reset latching solenoid is ideal for power interrupt switches and reclosers because it does not need constant power to maintain position, releases quickly when activated, and remains in the released position until manually reset. It has a high holding force, is temperature stable, and can release in less than 12 milliseconds at -40°C. The robust design eliminates the durability failure modes of standard U-frame designs. Size and configuration are customizable to fit a variety of application requirements.

Features & Benefits

- + High holding force
- + Direct acting
- + Two-position latching
- + Fast response
- + Robust design
- + Must be manually reset
- + Stable in wide range of temperatures
- + Customizable size and configuration


Applications

- + Power interrupt switches
- + Reclosers
- + Standby power systems
- + Access systems
- + Locks


Technical Data (custom configurations available)

- + Stroke (can be designed to specifications):
22.3 mm \pm .64 mm
- + Coil resistance at 20°C: 5.75 Ω \pm 0.3 Ω
- + Latched spring load: 59.16 N \pm 5.78 N
- + Response time: 12 ms max.
- + Release voltage: 3 to 30 Vdc
- + Operating temperature range:
-40°C to 50°C (-40°F to 122°F)
- + Durability: > 100K cycles
- + Minimum trip energy: .030 J
- + Electric strength: 500 Vac
for 1 second

All TLX components are customized to fit system requirements, meaning technical specifications are unique to each customer and design. Examples given are for illustration purposes only.

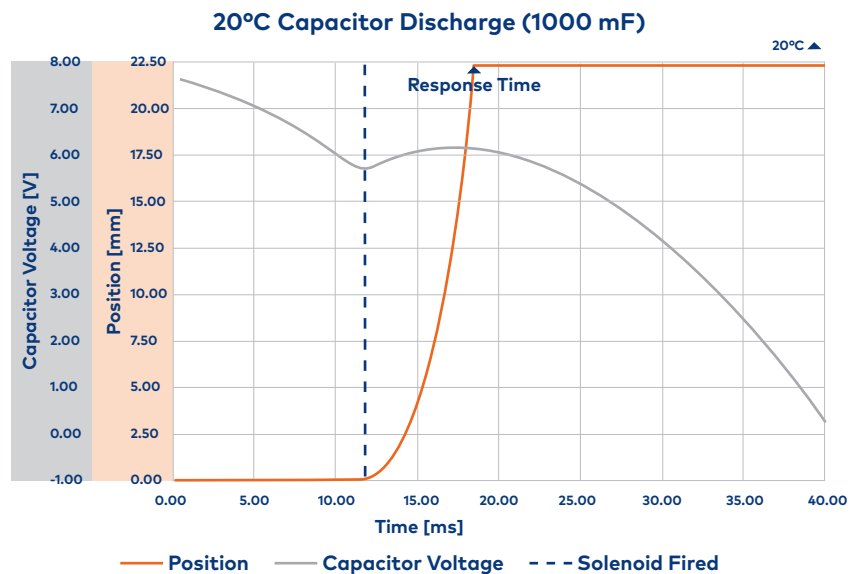

Dimensional Drawings (dimensions in millimeters [inches])

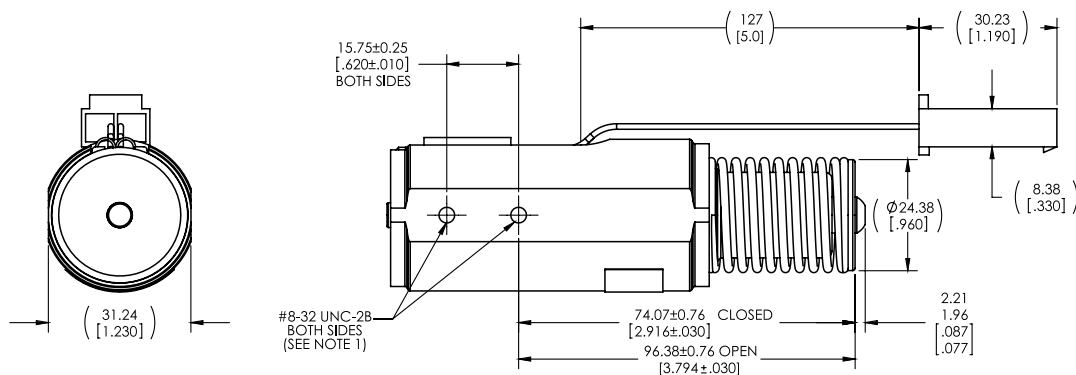

Legal Disclaimer Notice

ALL PRODUCT, PRODUCT SPECIFICATIONS, AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE.

TLX Technologies, LLC makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, TLX Technologies disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on TLX Technologies' knowledge of typical requirements that are often placed on TLX Technologies' products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in data sheets and/or specifications may vary in different applications, and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify TLX Technologies' terms and conditions of purchase, including but not limited to the warranty expressed therein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of TLX Technologies. Product names and markings noted herein may be trademarks of their respective owners.