
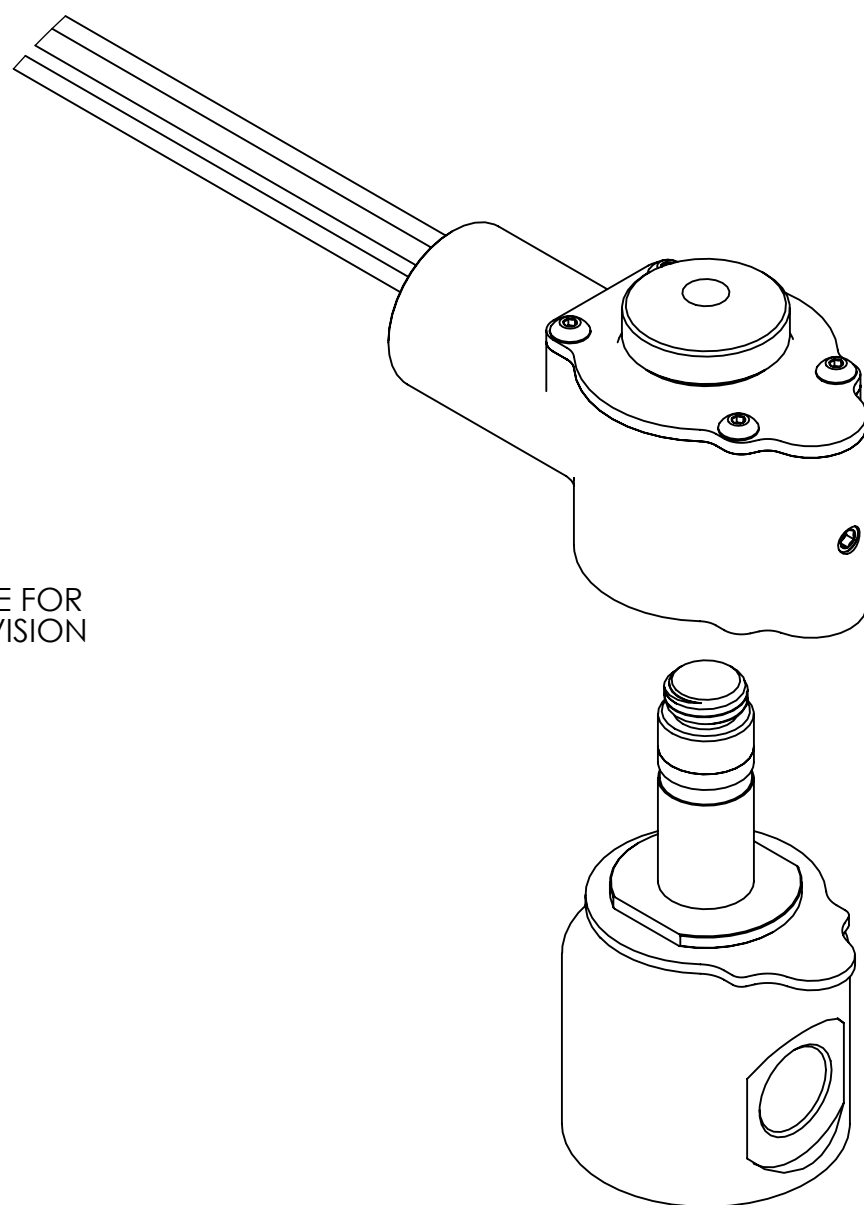
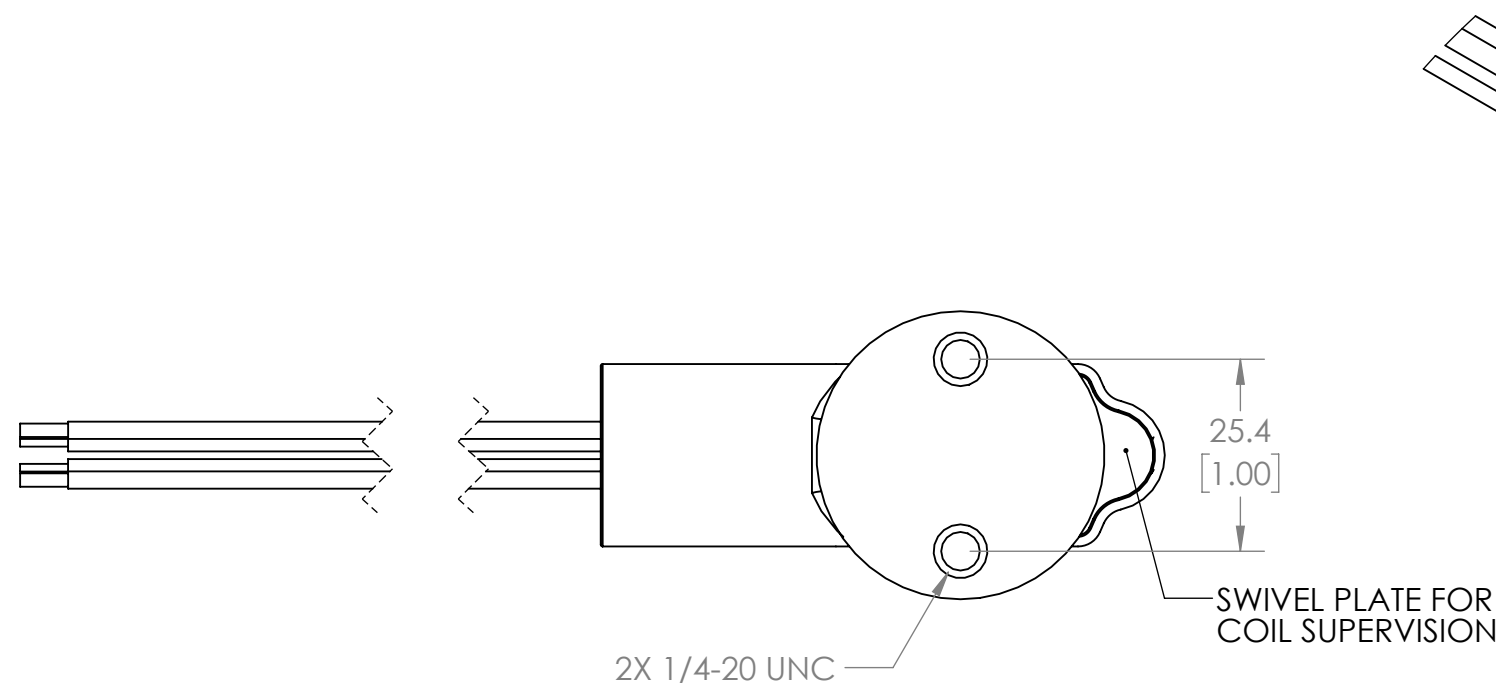
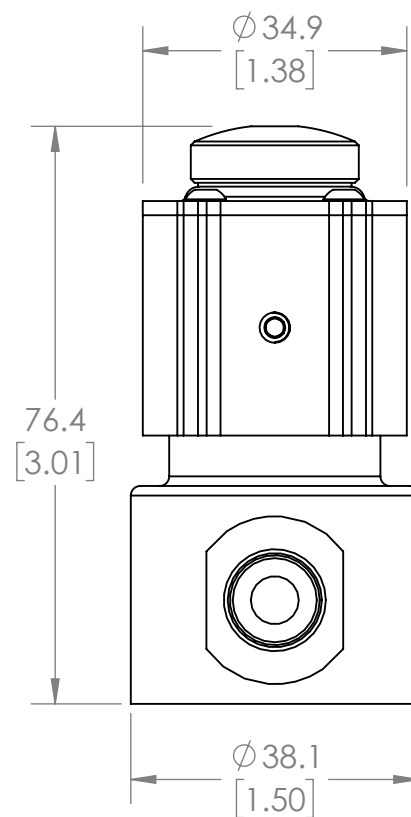
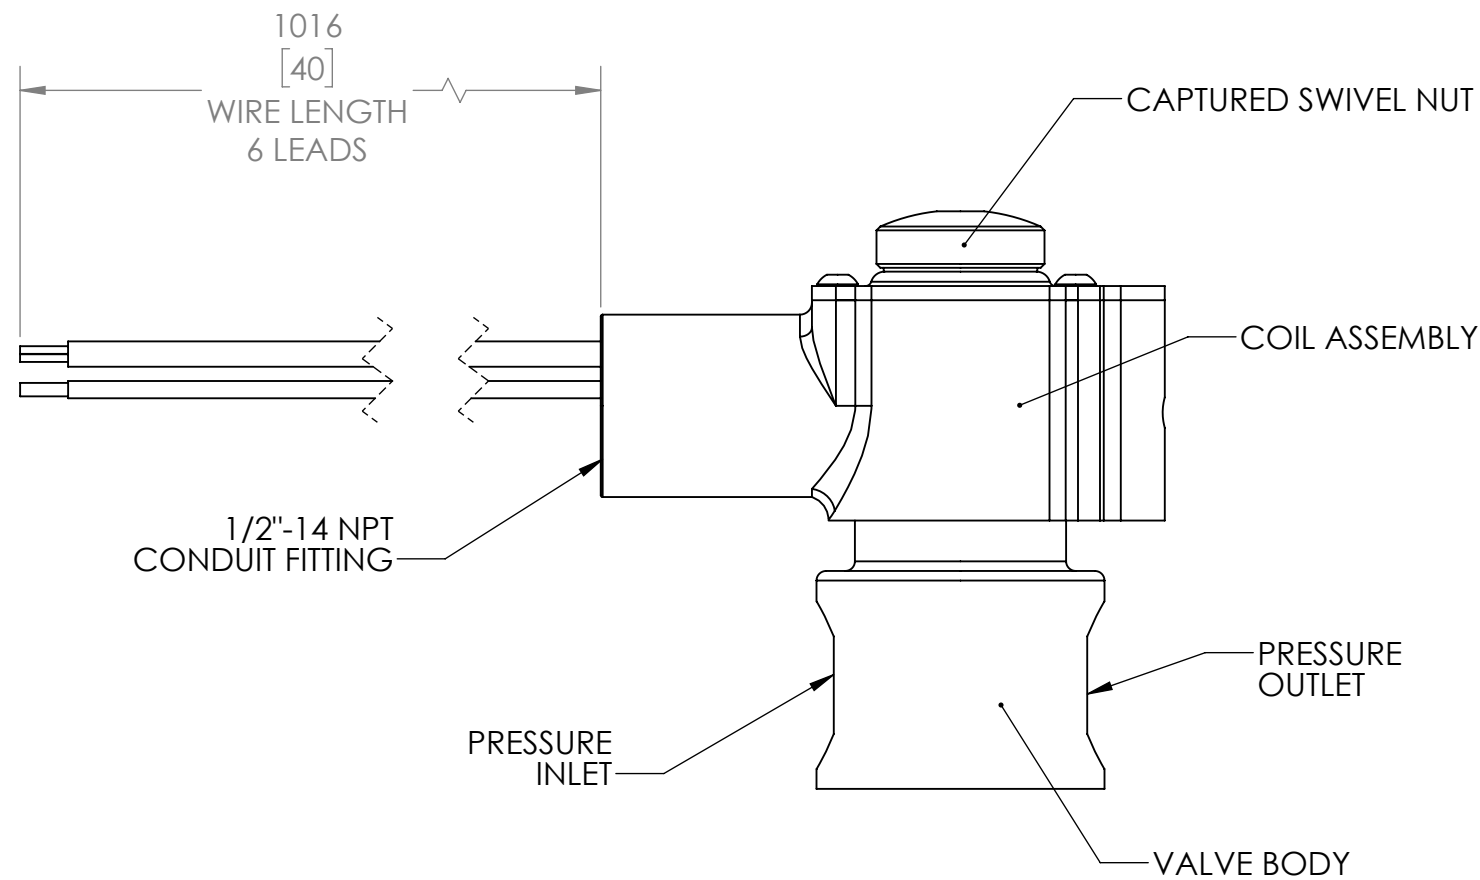


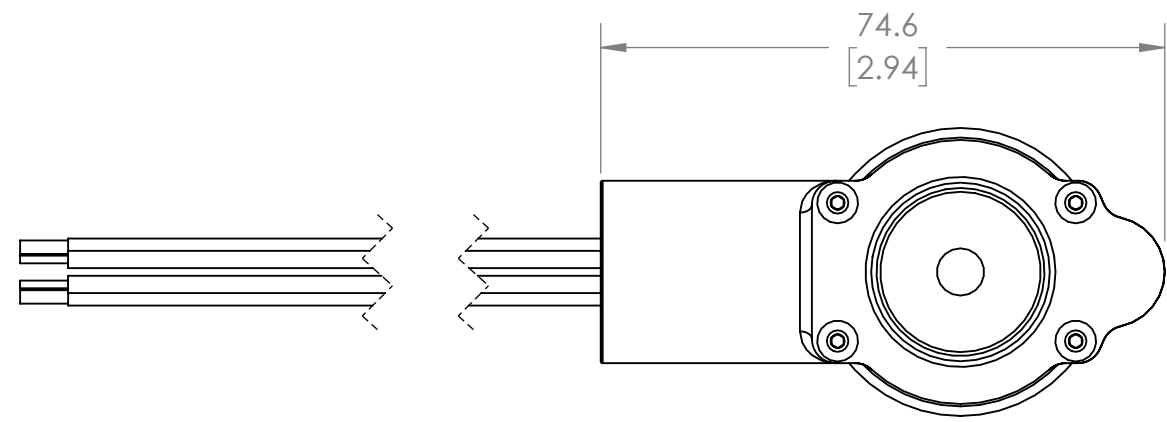

Interfacing options can be customized.
Give us a call to discuss your requirements.

INFORMATION:

TLX TECHNOLOGIES, PEWAUKEE, WI. PHONE: 262-970-8660, WWW.TLXTECH.COM

1. ELECTRICAL RATINGS/CONFIGURATIONS:

- A. VOLTAGE SUPPLY: 24 VDC
- B. CURRENT SUPPLY: 0.55 A
- C. DUTY CYCLE: CONTINUOUS
- D. COIL MONITORING CURRENT: <30mA
- E. COIL INSTALLATION SUPERVISION: INTERNAL NORMALLY CLOSED SWITCH
- F. WIRING DIAGRAM AS SHOWN


2. MECHANICAL SPECIFICATIONS:


- A. MEETS REQUIREMENTS OF UL 429, UL 429A, NFPA 2001: SEC. 4.3.4.1, AND EN 15004-1
- B. MAX OPERATING PRESSURE: 2200 PSI (151 BAR)
- C. OPERATING TEMPERATURE RANGE: -4 °F TO 131 °F (-20 °C TO 55 °C)
- D. RATED FOR INERT GASES
- E. NORMALLY CLOSED SOLENOID
- F. VALVE BODY: BRASS OR STAINLESS STEEL
- G. INLET/OUTLET PORT: 1/8" OR 1/4" NPT THREADS
- H. ORIFICE SIZE: 1/32"

3. MARKINGS:

EACH VALVE AND OPERATOR IS TO BE MARKED WITH THE RECOGNIZED COMPANY NAME, COMPLETE MODEL NUMBER AND UL'S U.S. AND CANADIAN RECONGITION MARK(S). ALL OTHER RATINGS ARE OPTIONAL.

PA0402-X WIRE DIAGRAM

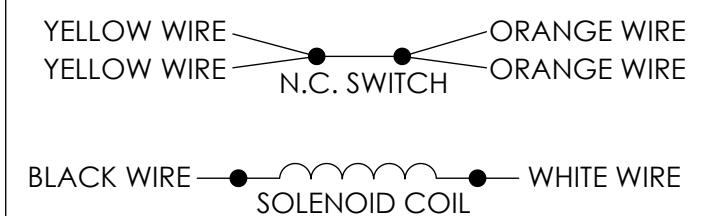

CUSTOMER P/N	REV	UNLESS OTHERWISE SPECIFIED:	NAME	DATE			
		DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS	DRAWN	2016-03-25			
		TOLERANCES:	CHECKED		TITLE: DIRECT ACTING SOLENOID		
		ANGULAR: 1°	ENG APPR.				
		TWO PLACE DECIMALS: ±0.01 THREE PLACE DECIMALS: ±0.005 SURFACE FINISH: 125 µin. MAX. RA EDGE BREAK: 0.005 MAX. MATERIAL	INTERPRET GEOMETRIC TOLERANCING PER: ASME Y 14.5-2018		SIZE	DWG. NO.	REV
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TLX TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TLX TECHNOLOGIES IS PROHIBITED.		FINISH	ALL DIMENSIONS ARE POST PLATE		C	PA0402-X	.02
					SCALE: 1:1	DO NOT SCALE DRAWING	SHEET 3 OF 3