


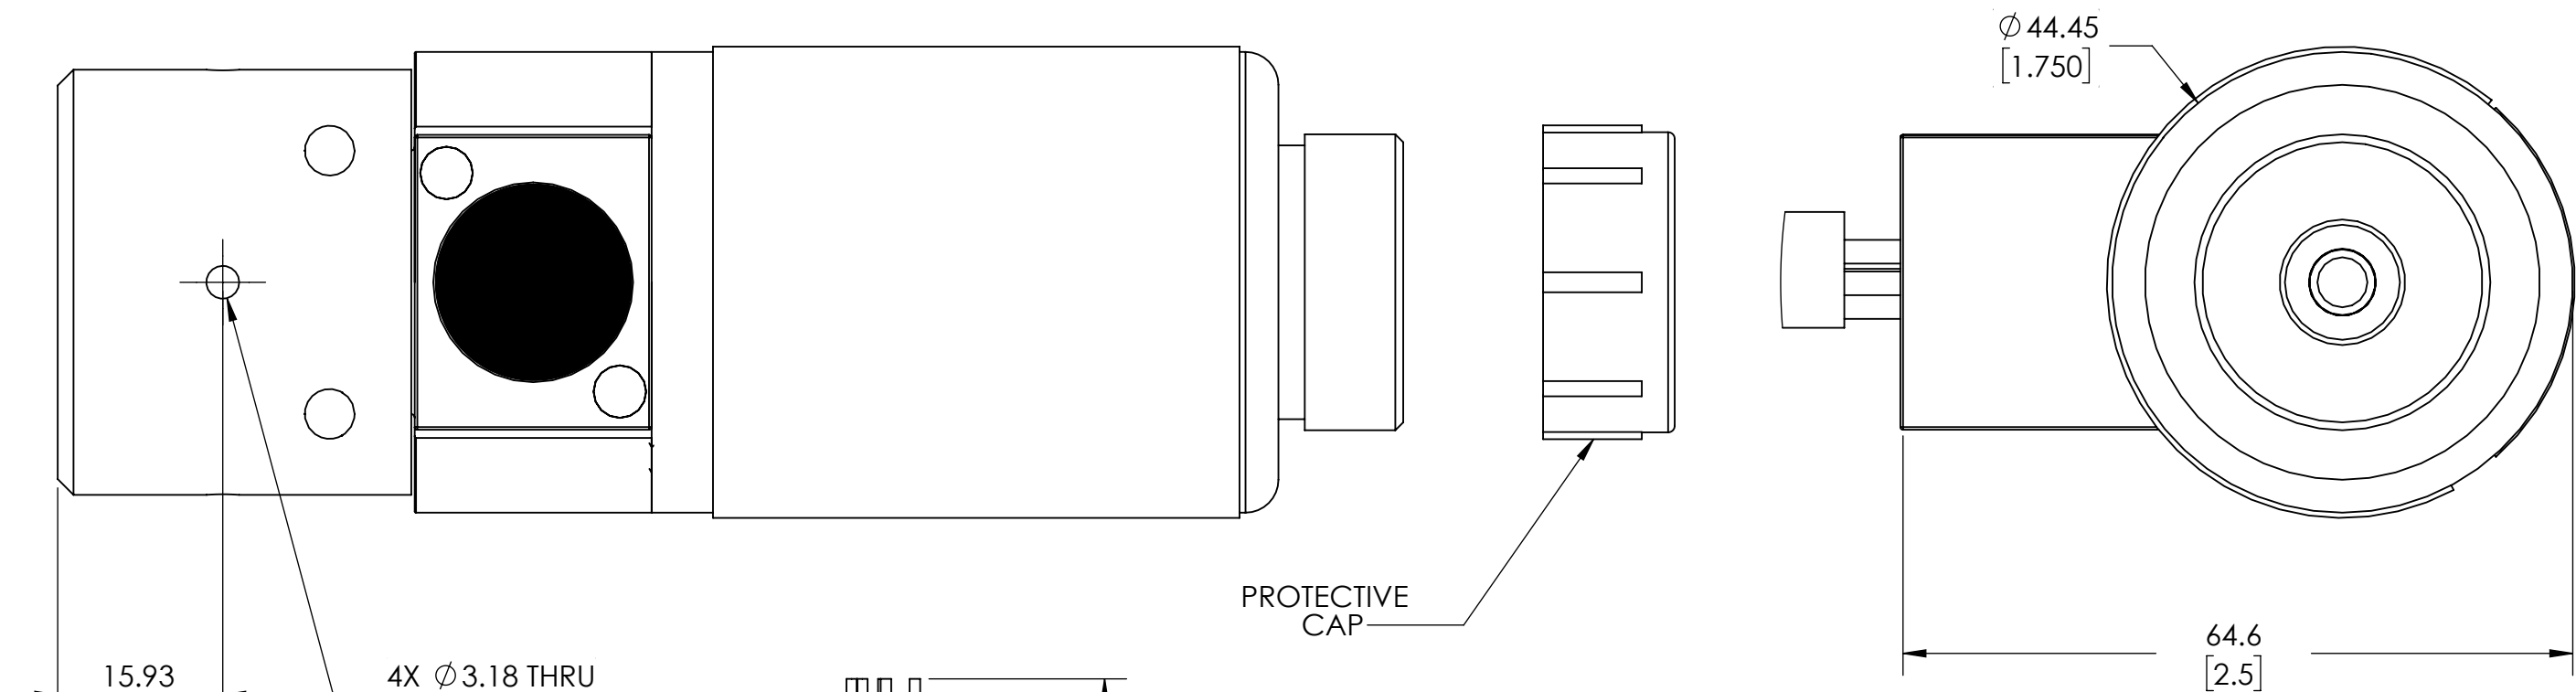


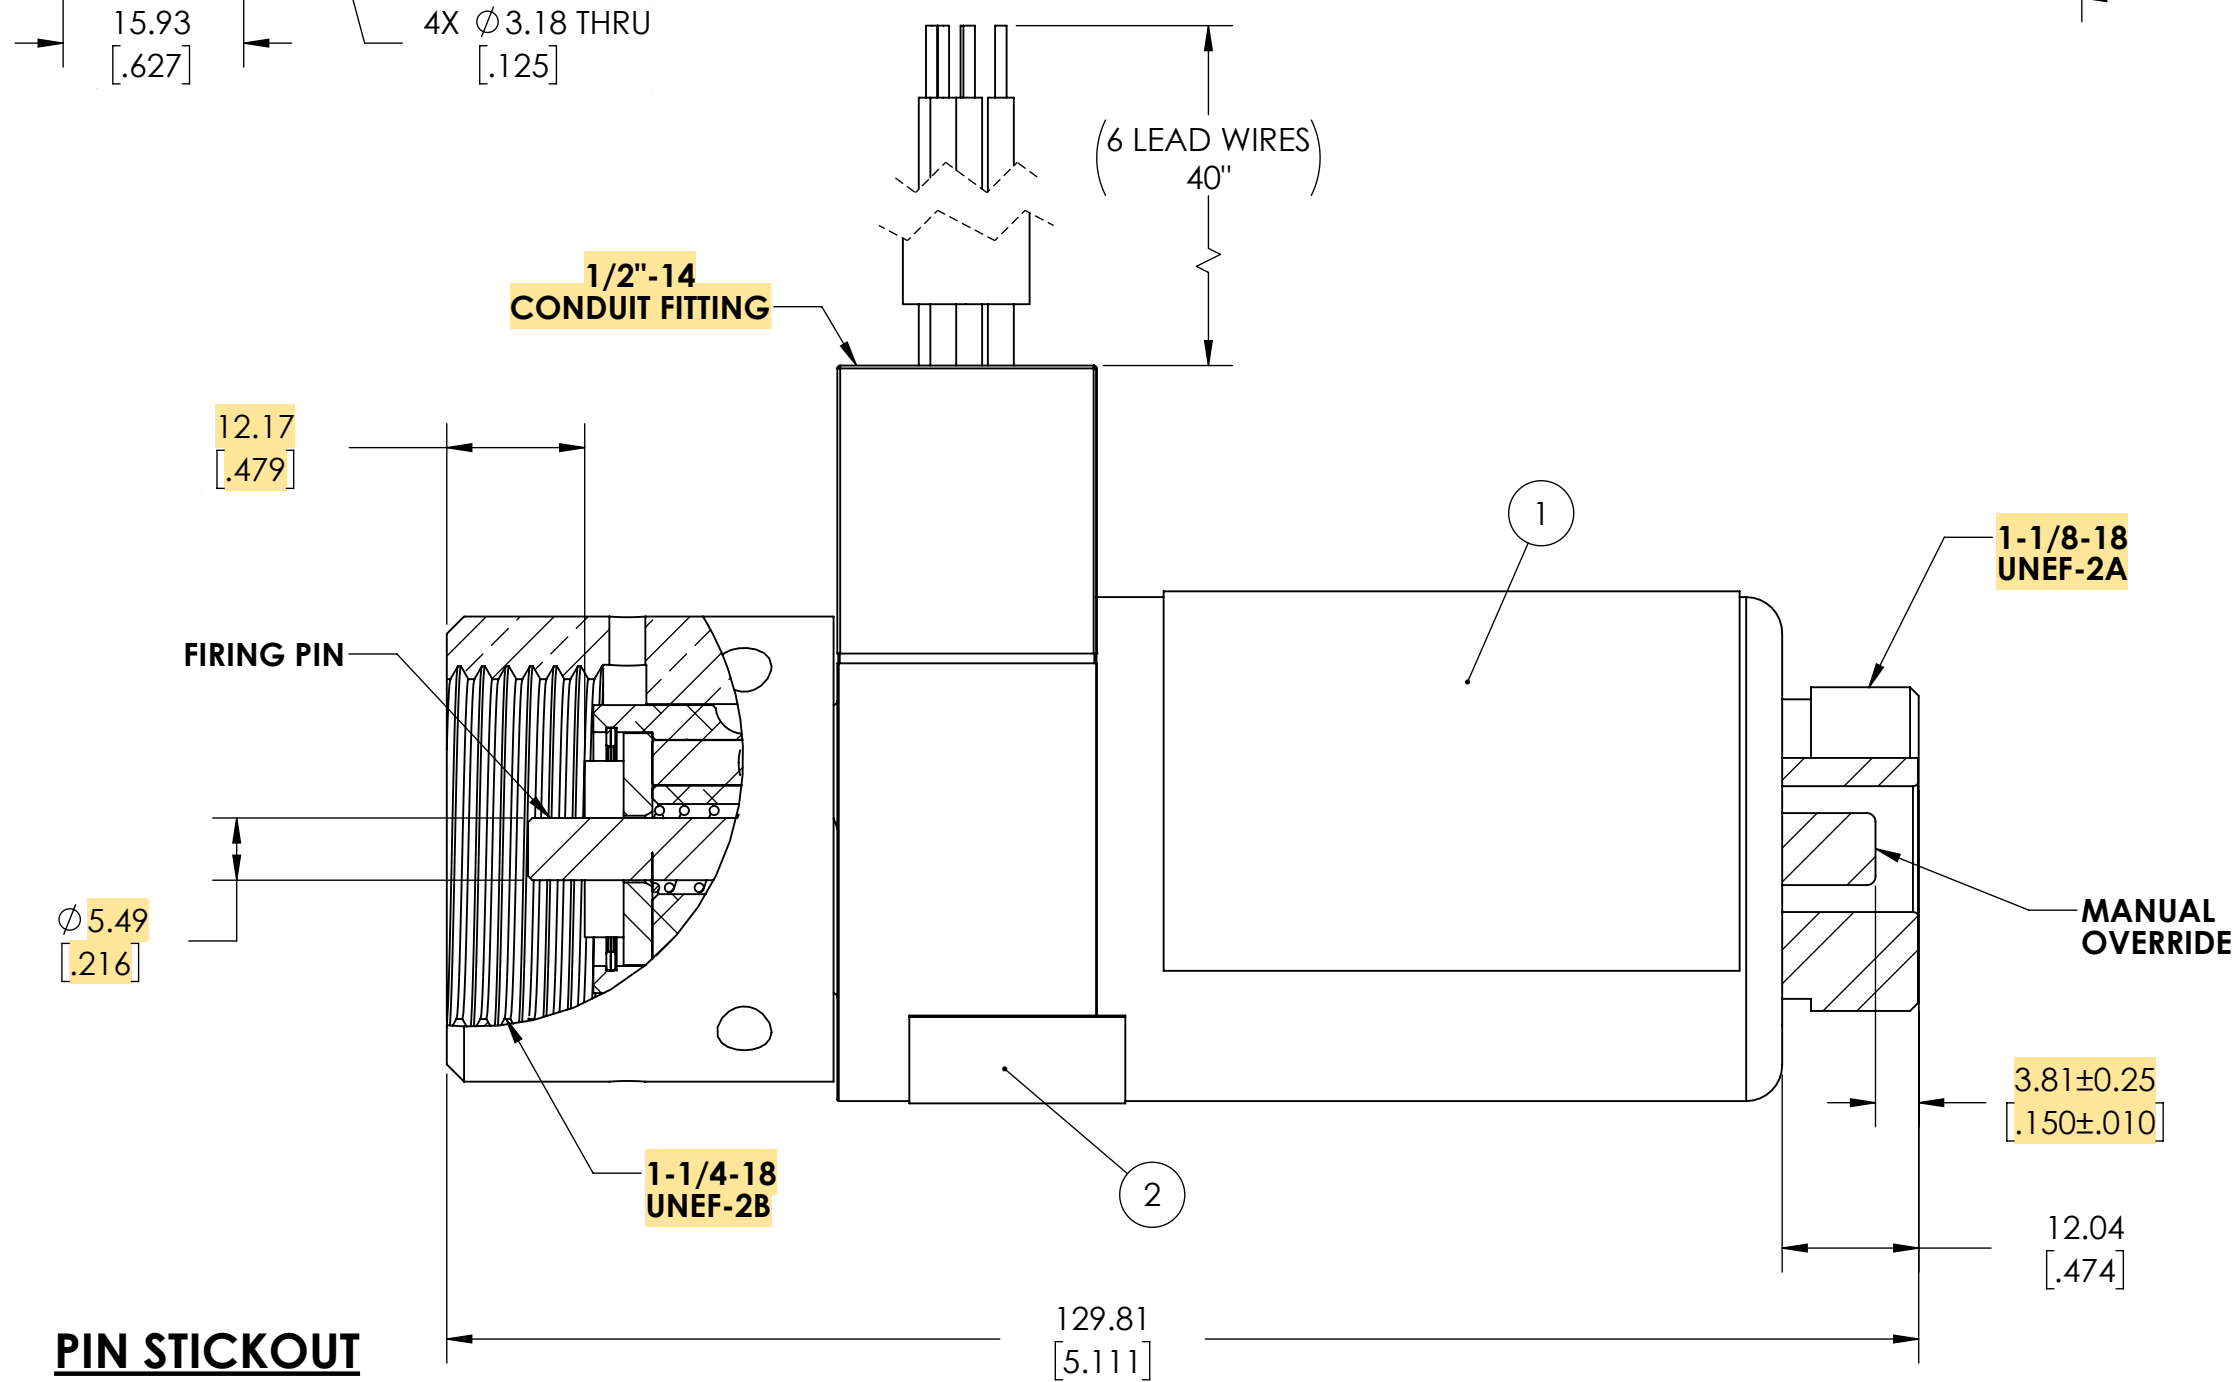

Options highlighted can be customized to fit your system. Give us a call to discuss your requirements.

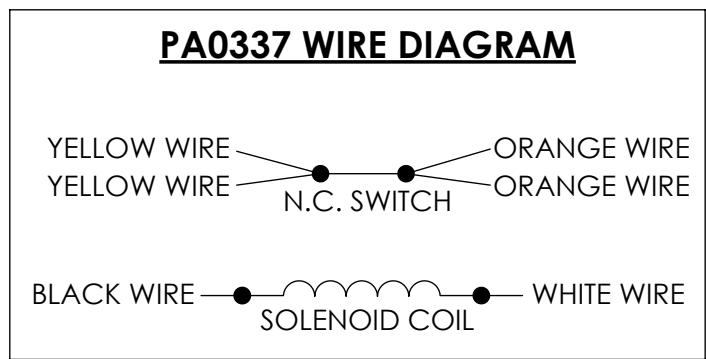

PIN STICKOUT

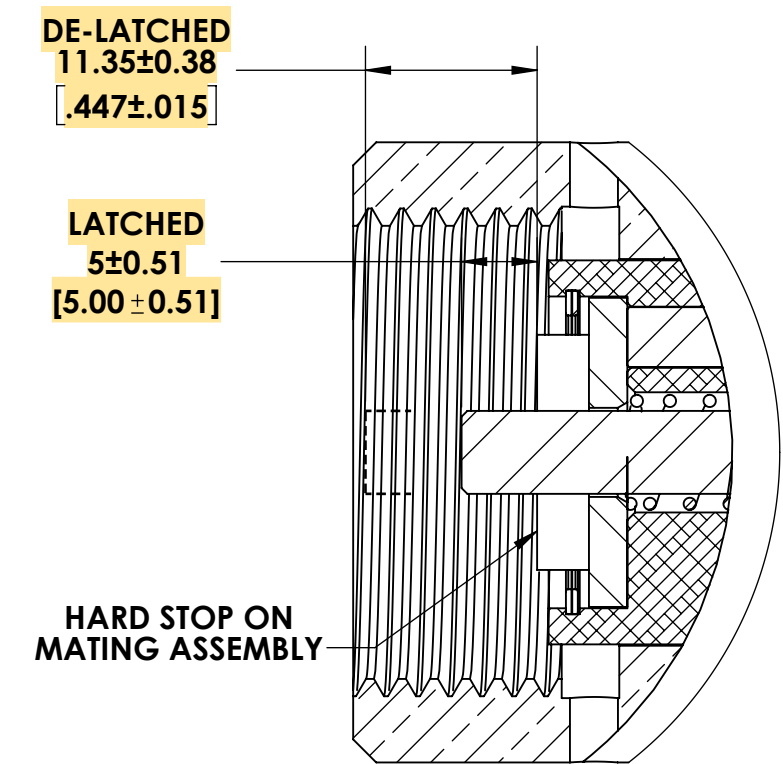

NOTES:

- SUPERVISED LATCHING SOLENOID ACTUATOR
TLX TECHNOLOGIES, PEWAUKEE, WI.
PHONE: 262-970-8660, FAX: 262-970-8665
- ELECTRONIC REQUIREMENTS/CONFIGURATIONS:
 - VOLTAGE SUPPLY: 24 VDC
 - CURRENT SUPPLY: 0.5A
 - MONITORING CURRENT: <30mA
 - NORMALLY CLOSED SUPERVISORY SWITCH (SWITCH OPEN WHEN ACTUATOR IS INSTALLED)
 - WIRING DIAGRAM AS SHOWN
 - REVERSE POLARITY COMPATIBLE VIA BRIDGE RECTIFIER CIRCUIT
- MECHANICAL REQUIREMENTS/CONFIGURATION:
 - TO BE A RECOGNIZED COMPONENT TO UL 864, FILE S24176
 - FIRING PIN FORCE: 12 LBS [53N] MINIMUM
 - MANUAL FORCE TO ACTUATE: NOT TO EXCEED 40 LBS [178N]
 - TEMPERATURE RANGE: -4°F TO 131°F (-20°C TO +55°C)
 - WIRE STRAIN RELIEF: 10LBS [44.5N] MINIMUM
 - CORROSION RESISTANT MATERIAL OR FINISH ON EXTERIOR COMPONENTS
 - ACTUATOR PIN TO BE IN THE LATCHED (RETRACTED) POSITION BEFORE SHIPPING
 - OPTIONAL ACCESSORIES:
 - MANUAL ACTUATION ASSEMBLY
 - RESET TOOL ATTACHMENT
- LABELS
 - TLX LABEL
 - LOT CODE LABEL

CUSTOMER P/N	REV	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE INCHES	NAME	DATE
THIRD ANGLE PROJECTION		TOLERANCES: ANGULAR: 1° LINEAR: ±0.13	DRAWN	
		SURFACE FINISH: 3.2 µm MAX. 0.13 MAX. EDGE BREAK ACCEPTABLE 0.13 MAX. CORNER RADIUS ACCEPTABLE	CHECKED	
		MATERIAL	ENG APPR.	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TLX TECHNOLOGIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TLX TECHNOLOGIES IS PROHIBITED.		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y 14.5-2018		
		FINISH		
ALL DIMENSIONS ARE POST PLATE				
TITLE: SUPERVISED LATCHING SOLENOID ACTUATOR		SIZE DWG. NO.	REV	
		C PA0337		
SCALE: 2:1		DO NOT SCALE DRAWING	SHEET 7 OF 7	