



## Supervised Direct-Acting Solenoid Valve

The patented supervised direct-acting solenoid valve is designed for gas and hybrid systems with operating pressures up to 150 bar. This normally closed valve features a removable coil to allow for periodic testing. It also features a captured fastener that prevents the fastener from being misplaced and ensures full placement of the coil. Integrated supervision indicates whether the coil has been properly reinstalled after testing and eliminates the need for an add-on supervisory component.

### Features & Benefits

- + UL 429 & 429A Recognized Component
- + Removable coil for maintenance and testing
- + Fully engaged installation detection
- + Ultrafast response
- + Integrated supervision with 6-wire standard
- + Captured fastener completes full placement of the coil
- + Full metal enclosure with factory-installed wiring
- + Coil assembly freely rotates for easy installation
- + Designed to safeguard against tampering
- + Customizable interfacing options
- + Engineering expertise to help achieve UL, FM, CE, LPCB, & VdS certifications and listings

### Technical Data (custom configurations available)


- + Supply voltage: 24 Vdc
- + Monitoring current: < 30 mA
- + Operating temperature range: -20°C to 55°C (-4°F to 131°F)
- + Maximum operating pressure: 150 bar (2200 psi)
- + Supply current: 0.55 A
- + Body diameter: 38 mm
- + Length: 76 mm

*All TLX components are customized to fit system requirements, meaning technical specifications are unique to each customer and design. Examples given are for illustration purposes only.*



The supervised direct-acting solenoid valve is specifically designed for gaseous fire suppression systems and meets the UL, NFPA, and EN requirements for these systems.

## Dimensional Drawings (dimensions in millimeters [inches])

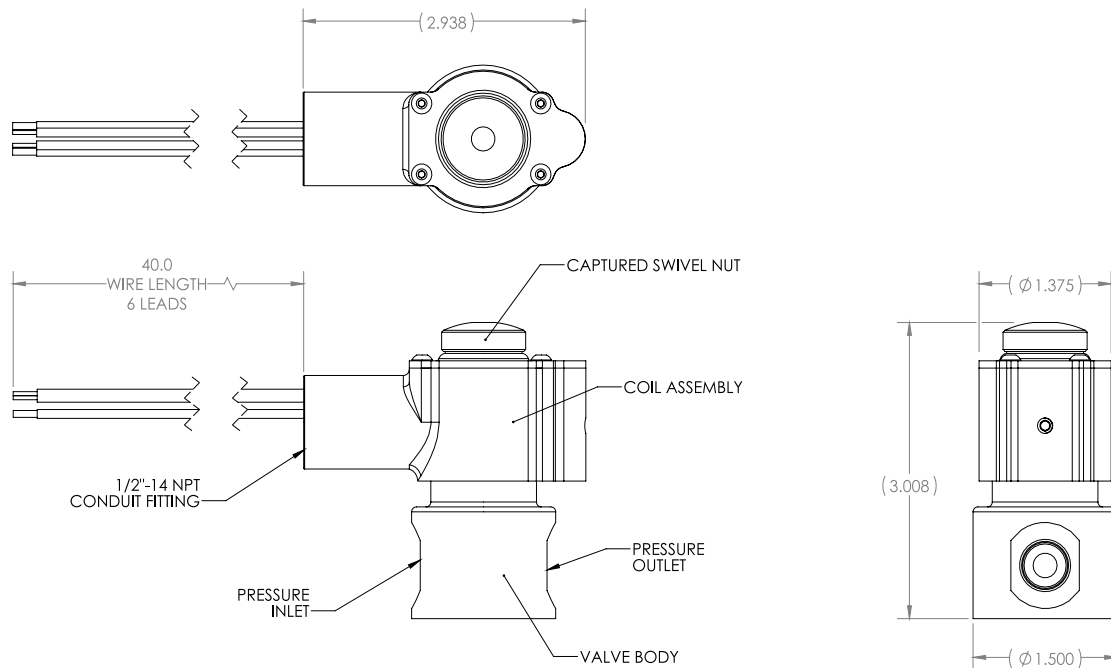

## Legal Disclaimer Notice

ALL PRODUCT, PRODUCT SPECIFICATIONS, AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE.

TLX Technologies, LLC makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, TLX Technologies disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on TLX Technologies' knowledge of typical requirements that are often placed on TLX Technologies' products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in data sheets and/or specifications may vary in different applications, and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify TLX Technologies' terms and conditions of purchase, including but not limited to the warranty expressed therein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of TLX Technologies. Product names and markings noted herein may be trademarks of their respective owners.